

## ResinDek® Product Lineup

### ResinDek® LD

ResinDek® LD 3/4" thick panel supports up to 2,000 lbs in live and dead pallet truck loads. This light duty floor panel is a tremendous value for warehouse mezzanine floors, elevated floors or rack platforms. Available in UF (unfinished), Gray Diamond Seal®2, Gray Diamond Seal 2 with ESD, TriGard® or MetaGard® finishes.

### ResinDek® SD

ResinDek® SD, standard duty, is the perfect solution for supporting live and dead pallet truck loads up to 2,500 lbs. This 3/4" thick panel is available in UF (unfinished), Gray Diamond Seal®2, Gray Diamond Seal 2 with ESD, TriGard® or MetaGard® finishes.

### ResinDek® MD

When you need to support up to 3,500 lbs in live and dead pallet truck loads, the ResinDek® MD, medium duty, 3/4" thick panel is the valued engineered solution. Available in Gray Diamond Seal®2, Gray Diamond Seal 2 with ESD, TriGard® or MetaGard® finishes.

### ResinDek® HD

A heavy duty mezzanine flooring panel that that must support live and dead pallet jack loads up to 4,500 lbs. Available in Gray Diamond Seal®2, Gray Diamond Seal 2 with ESD, TriGard® or MetaGard® finishes.

### ResinDek® MAX

Maximum strength designed and engineered to support electric pallet jacks. At 1-1/2" thick the ResinDek® MAX can withstand both the daily rigors of heavy, electric pallet jack rolling loads and dead loads up to 8,000 lbs. Available in Gray Diamond Seal®2, Gray Diamond Seal 2 with ESD, TriGard® or MetaGard® finishes.

### ResinDek® Xspan®

Structural flooring solution where NO metal corrugated substructure is required. This 1-1/8" thick panel supports up to 3,000 lbs in live and dead pallet truck loads. Available in Gray Diamond Seal®2, Gray Diamond Seal 2 with ESD, TriGard® or MetaGard® finishes. Please refer to the website for ResinDek load spans.

### ResinDek® Xspan® FR

Flame Resistant structural flooring meets ASTM E-84 Class "A" flame spread less than 25, meets UK Class "O", as well as European standards EN 13501-1 and is rated as C<sub>FL</sub>-s1. Like the ResinDek Xspan®, Xspan® FR requires no corrugated metal substructure and can support up to 3,800 lbs. This 1-1/8" thick panel is available in Gray Diamond Seal®2, Gray Diamond Seal 2 with ESD, TriGard® or MetaGard® finishes. Please refer to the website for ResinDek load spans.

NOTE: We recommend that a minimum of 20 gauge metal B Deck be used on all ResinDek® flooring projects (with the exception of Xspan®) and a minimum of 18 gauge when live and dead pallet jack loads exceed 2,500 lbs.

## ResinDek® Mezzanine Floor Panels



Product Name	Pallet Jack Load Limits **	Thickness	UF	Finishes Available			
				GDS2	ESD	TriGard®	MetaGard®
ResinDek® LD	up to 2,000 lbs.	3/4"	■	■	■	■	■
ResinDek® SD	up to 2,500 lbs.	3/4"	■	■	■	■	■
ResinDek® MD	up to 3,500 lbs.	3/4"	n/a	■	■	■	■
ResinDek® HD	up to 4,500 lbs.	3/4"	n/a	■	■	■	■
ResinDek® MAX	up to 8,000 lbs.	1-1/2"	n/a	■	■	■	■
* ResinDek® Xspan®	up to 3,000 lbs.	1-1/8"	n/a	■	■	■	■
* ResinDek® Xspan® FR	up to 3,800 lbs.	1-1/8"	n/a	■	■	■	■

#### Finishes Available


Unfinished  
Gray Diamond Seal® 2  
ESD Certified Static Control  
TriGard®  
MetaGard®

#### Options

Invisi-Loc® fasteners  
T & G Configurations

All ResinDek Products can contribute towards earning points for LEED® qualified buildings.

\* No Corrugated Required  
\*\* Includes Weight of Pallet Jack

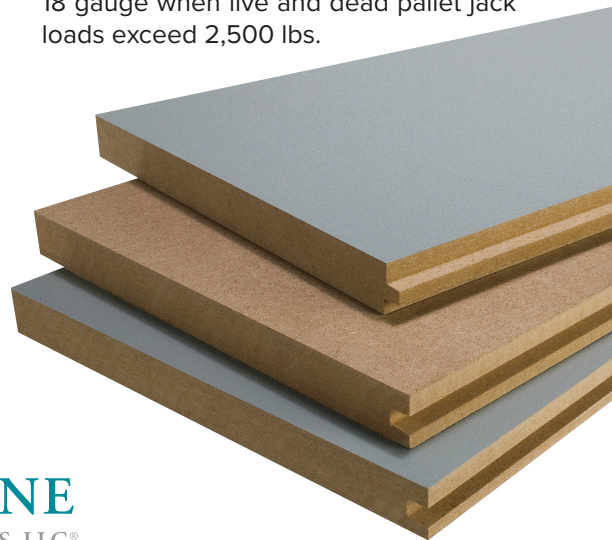

888.755.3048 | 513.772.5560 | info@resindek.com | www.resindek.com